


12 Hole / 15 Notch General Purpose Eddy Current Bolt Standard Block

NDE TECH

The Product from India

The Reference Standards for NDT Industry

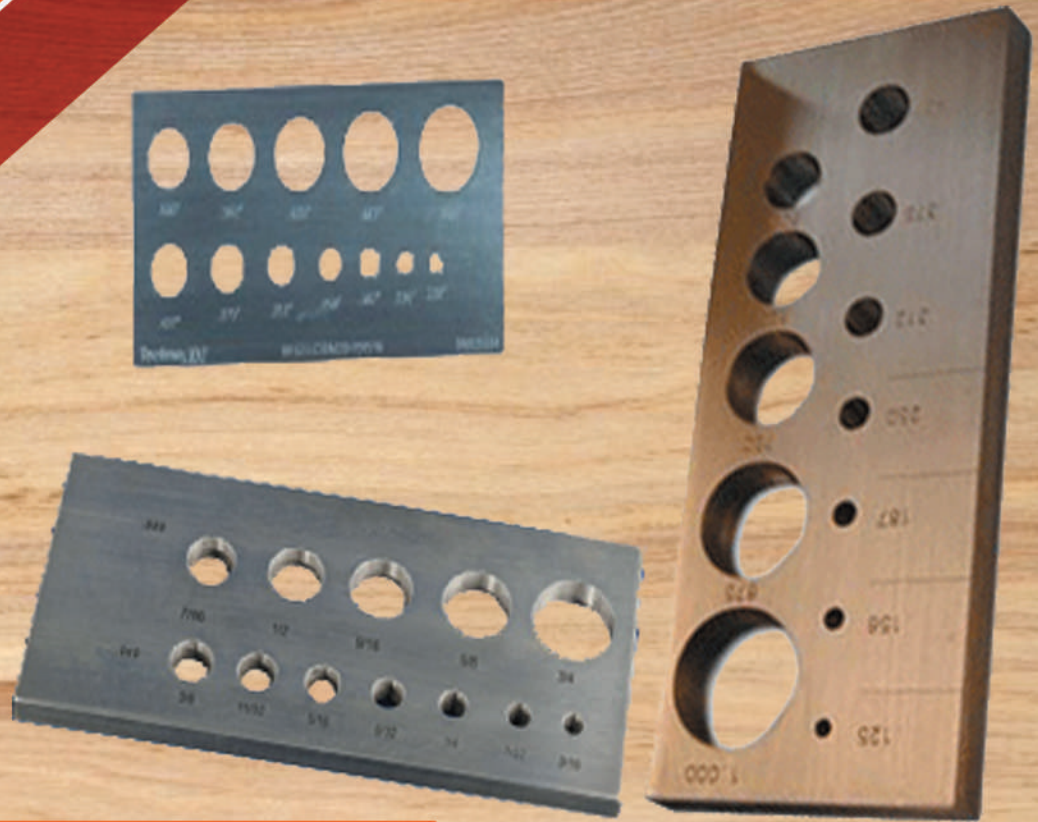

12 Hole / 15 Notch Eddy Current Calibration Block

Geometry: Block Sizes: 0.25" thick x 2.5" x 6.0"

Holes: 3/16", 7/32", 1/4", 9/32", 5/16", 11/32", 3/8", 7/16", 1/2", 9/16", 5/8" and 3/4" diameter

Surface Notches: Qty 3 @ .008", .020" and .040" deep x 1.0" long

Notch Width (All): .004" (\pm .001)

Hole Notch Configurations:

(1) .030" x .030" (45°) corner notch @ .004" wide in each hole (Qty 12)

(1) .020" full-bore (thru) notch @ .004" wide in each hole - (Qty 12)

(1) Full-bore (thru) notch @ .020" deep x .004" wide and (1) .030" x .030"

(45°) corner notch @ .004" in each hole, 180° apart (Qty 24)

(1) Mid-bore notch @ .030" deep x .004" wide x .060" long in

each hole - (Qty 12).

Material: Available in different grade materials.

**NDE TECH
India.**

www.ndetech.org.in
info@ndetech.org.in
sales@ndetech.org.in
+91-44-24763755